

SUNWARD

INNOVATION LEADS TO VALUE



Harmonious, beautiful and classy.

Sunward USA Corp

Add: 2710 Geesling Rd.

Denton, TX 76208

Tel: (469) 353-6890

E_mail: sales@sunwardusa.com

Please read the manual book and maintenance book before operation, changes are periodically added to the information, and Sunward may change the products or services described in this book at any time without announcement. All rights of this manual book reserved to Sunward. SUNWARD Internal Use Only

SWE 2019-6

SWL3230/3220

A perfect machine for urban construction and an expert on efficient and energy conservation.

Engine power: 74.3hp(55.4kW)

Operating weight: 7613lb(3450kg)


Rated operating capacity: 2427lb(1100kg)



The customized Kubota engine imported with original packaging can reach the strictest emission standards (EU Stage 5 and EPA U.S. T4F), and it features strong power, high reliability, low noise, energy saving and environmental protection.



Design structure enables machine to have a higher lifting height than other brands.

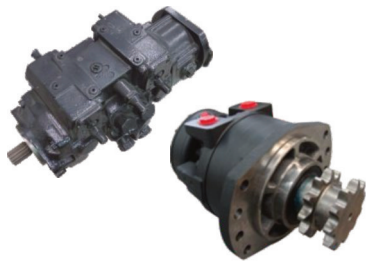

Static hydraulic traveling system, equipped by advanced anti-overloading hydraulic device, large-torque motor, big driving force, with self-brake function, safe and reliable.



Adapt to international common quick coupler, fast change various kinds attachment. Majority of attachments can be used in Sunward skid steer loader.

Durable and reliable reinforced structures.



A Air filter

B Oil return filter

C Hydraulic oil tank cap

D Fuel filter


E Oil-water separator

F Fuel tank cap



G Engine oil filter

H Auxiliary tank

L Heater valve switch

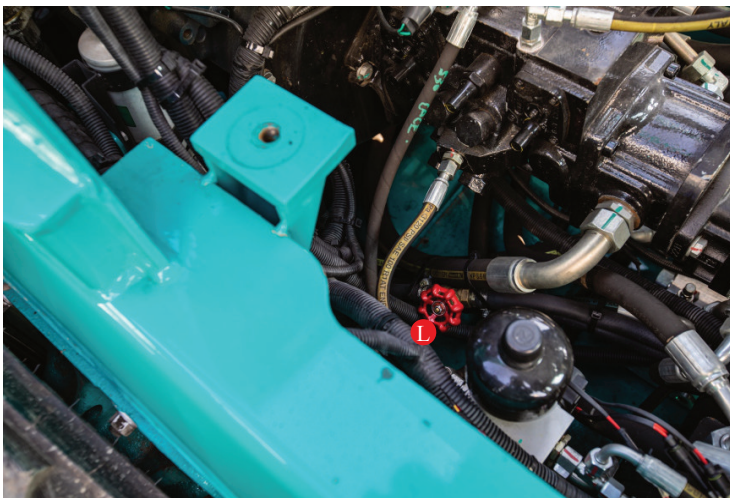

Easy, comfortable and safe operation.

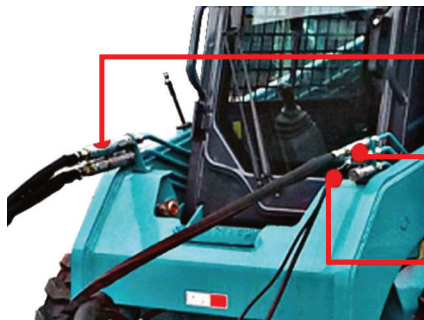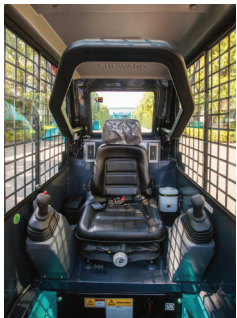

Large-discharge output

Standard-discharge output

Electronic control output



- Wide space and good visibility, easy in/out access. The control panel is very accessible
- Conform to EROPS/OROPS standard cab system
- Three-level electric starting protection system
- Complete warning beacon, warning signal and reverse horn.
- Rear window detachable.
- Equipped with heater and air conditioning, choose appropriate configuration depending on different regions.

Adjustable suspension seat conforms to ergonomics, and can meet the requirements of different heights and weights.



Excavator SWL3230

Operating Weight	7613lb(3450kg)
Engine Power	74.3hp(55.4kW)/2600rpm
Engine Brand	KUBOTA
Rated Operating Capacity	2427lb(1100kg)
Bucket Width	72.0in(1830mm)



Engine

Brand	KUBOTA
Model	V3307-CR-TE5B
Type	4-cylinder, water cooling, diesel engine
Emission Level	EPA Tier4F/EU Stage V
Power	74.3hp(55.4kW)/2600rpm
Peak Torque	195.5lb*ft(265N*m)/1500rpm

Hydraulic System

Hydraulic Flow_Std	22.7gpm(86lpm)
Hydraulic Flow_High	34.6gpm(131lpm)
Std Flow Pressure	3045psi(210bar)
High Flow Pressure	2393psi(165bar)

Electrical System

Starter	12V/3.0kW
Alternator Rating	12V/80A
Battery	120Ah

Performance

Operating Weight	7613lb(3450kg)
Rating Operating Capacity	2427lb(1100kg)
Tipping Load	4854lb(2200kg)
Breakout Force Curl	5472lb(2480kg)
Breakout Force Lift	5362lb(2430kg)
Travel Speed	7.8mph(12.6kph)

Operation Specifications

Max. Overall Height	158.3in(4020mm)
Height to Hinge Pin	123.0in(3123mm)
Height to Top of Cab	81.4in(2068mm)
Height to Bottom of Level Bucket	116.1in(2948mm)
Length w/o Std	116.5in(2958)
Length w/ Std Bucket	146.7in(3727mm)
Max. Dump Angle	43deg
Dump Height	94.3in(2395mm)
Dump Reach	24.6in(625mm)

Excavator SWL 3230

Operating Weight	7613lb(3450kg)
Engine Power	74.3hp(55.4kW)/2600rpm
Engine Brand	KUBOTA
Rated Operating Capacity	2427lb(1100kg)
Bucket Width	72.0in(1830mm)



Service Refill Capacities

Hydraulic Tank	15.9gal(60L)
Fuel Tank	29.1gal(110L)



Operation Specifications

Rollback Angle(Ground)	30deg
Rollback Angel (Max Height)	93deg
Wheelbase	45.2in(1148mm)
Ground	8.1in(205mm)
Departure Angle	26deg
Turning Radius from Center (Coupler)	52.9in(1344mm)
Turning Radius from Center (Bucket)	86.7in(2201mm)
Turning Radius from Center (Machine Rear)	68.8in(1747mm)
Bumper Overhang Behind Rear Axle	46.1in(1170mm)
Width Over Tire	58.1in(1475mm)
Bucket Width	72.0in(1830mm)



PROMO & FINANCING

Sunward USA has teamed up with Taycor Financial who has offices in Los Angeles, CA, Irvine, CA, and Boston, MA. Taycor Financial has been a part of business growth and development for nearly 30 years. Our customers are on Main Street, not Wall Street, and our mission statement reflects that. Our goal is to provide first-class service and a full range of financial products ranging from equipment leasing and financing to hybrid lines of credit and working capital.

✓ Conserve Cash Flow

Let the equipment you buy pay for itself over time with a fixed monthly payment.

✓ No Prepayment Penalties

Not only are there no penalties, there is a benefit and cost savings to you when paying off early.

✓ Flexible Programs

Choose the term, structure, and even payment deferral options that fit your needs.

✓ 100% Financing

Finance the entire purchase price of the equipment you need with no down payment.

✓ Tax Advantages

Taycor offers a full array of finance products to maximize your company's tax benefits.

✓ Expansive Equipment Options

Shop with freedom, purchase the new or used equipment from the seller(s) of your choice.